



Lamiflex



**Wide range
of substrates**



**Tension control
in 4 sections**



Precise lamination

The Lamiflex solvent free laminator is an ideal entry level machine for those entering a new lamination business and seeking for new opportunities. The laminator offers attractive ROI, high quality laminating technology, easy operation and lower operational opportunities.

Web width 850/1320 mm
33.5/52"

Min. web width 300 mm
11.8"

Speed 350 m/min
1148 fpm

Rewind tension range 50 N-320 N

Processed materials BOPP, PET, PE, LDPE PP, AL, foil or paper

Roll weight 800 kg
1763.7 lbs

Inner core diameter 76.2/152.4 mm
3/6"

Roll diameter 850/1000 mm
33.5/39.4"

Unwind tension range 30 N-250 N

Temperature control system
04, 06, 08



Roller pre-wash-up system
04, 05, 06




Tension control in 4 sections
01, 02, 03, 10



Three roller laminating unit
08, 09



Shaft-less unwinds and rewind
01, 02, 03

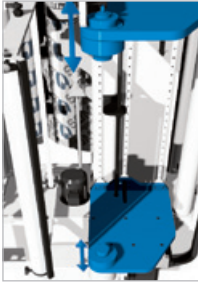


Cooling cylinder
13



Sleeved transfer roller
05



Touch screen

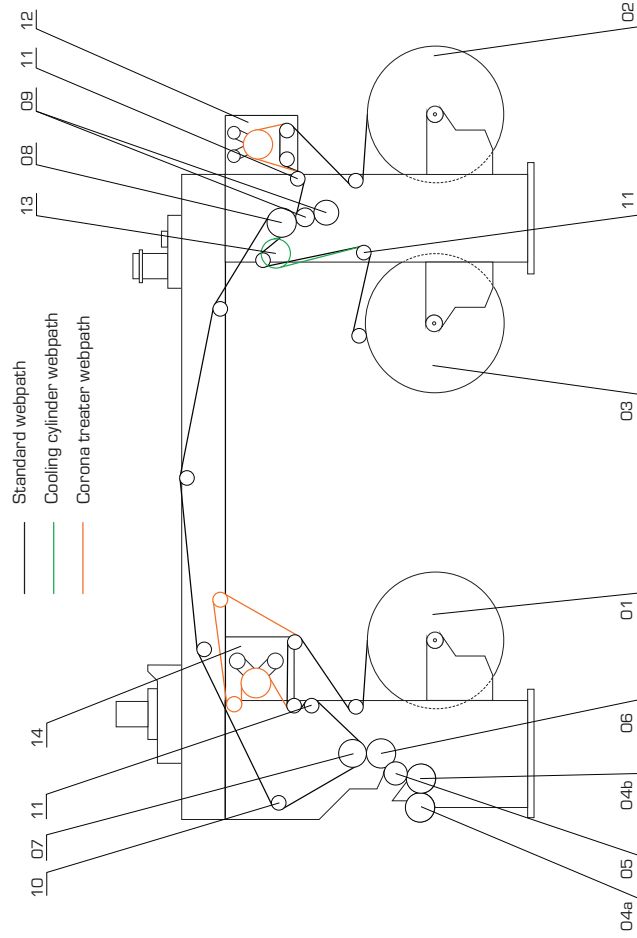

Fume exhausting unit



- 01 Primary unwind
- 02 Secondary unwind
- 03 Rewind
- 04 Thermo-controlled rollers
- 05 Transfer sleeved roller
- 06 Applicator thermo-controlled roller
- 07 Lay-on roller
- 08 Lamination thermo-controlled roller
- 09 Lamination double lay-on roller
- 10 Tenzometric roller (Load cell)
- 11 Adjustable roller
- 12 Secondary corona treater (optional)
- 13 Cooling cylinder (optional)
- 14 Primary corona treater (optional)



SOMA spol. s r. o., B. Smetany 380,
563 01 Lanškroun, Czech Republic

tel +420 465 350 811
fax +420 465 350 815

e-mail sales@soma.cz
www.soma-eng.com